

# SUS Ferrules

- Custom design
- Capable custom design
- Single and dual hole (IDs) available


## Applications

- Coaxial Modules
- Pigtailed Devices



## SUS Ferrules

Dimension: Millimeters

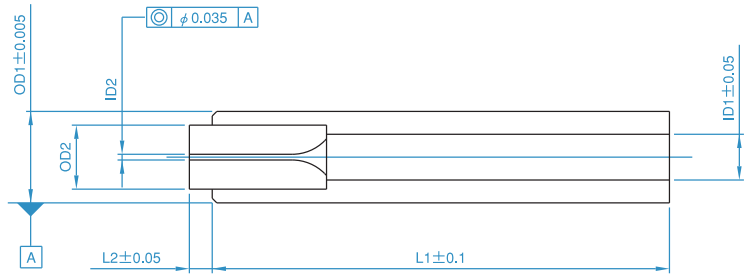


### Options Please inquire for custom design.

● Custom Marking

1.D-Cut Marking



2.Scratch Marking



● SUS steps



● Dual Hole Capillary



## Ordering Codes A M F - [ ] - [ ] - [ ]

Sus Outside Diameter	SUS Total Length	SUS Inside Diameter	Capillary Outside Diameter	Capillary Inside Diameter	Prominent Capillary Length from SUS Body
1 : φ1.8mm	060 : 6mm	1 : φ1.0mm	A : φ1.1mm	1 : φ0.1250mm	00 : 0.0mm
2 : φ2.0mm	100 : 10mm	2 : φ1.1mm	B : φ1.4mm	2 : φ0.1260mm	05 : 0.5mm
3 : φ2.5mm	150 : 15mm				10 : 1.0mm

\*Any number can be entered