



Orbray



OPTICAL ENCODER
ELECTRICAL CONNECTIONS
PULSE/REV

# 1	(MOTOR+)
# 2	V _{cc} (DC5V±10%)
# 3	Ch. A
# 4	Ch. B
# 5	Ch. Z
# 6	GND
# 7	(MOTOR-)

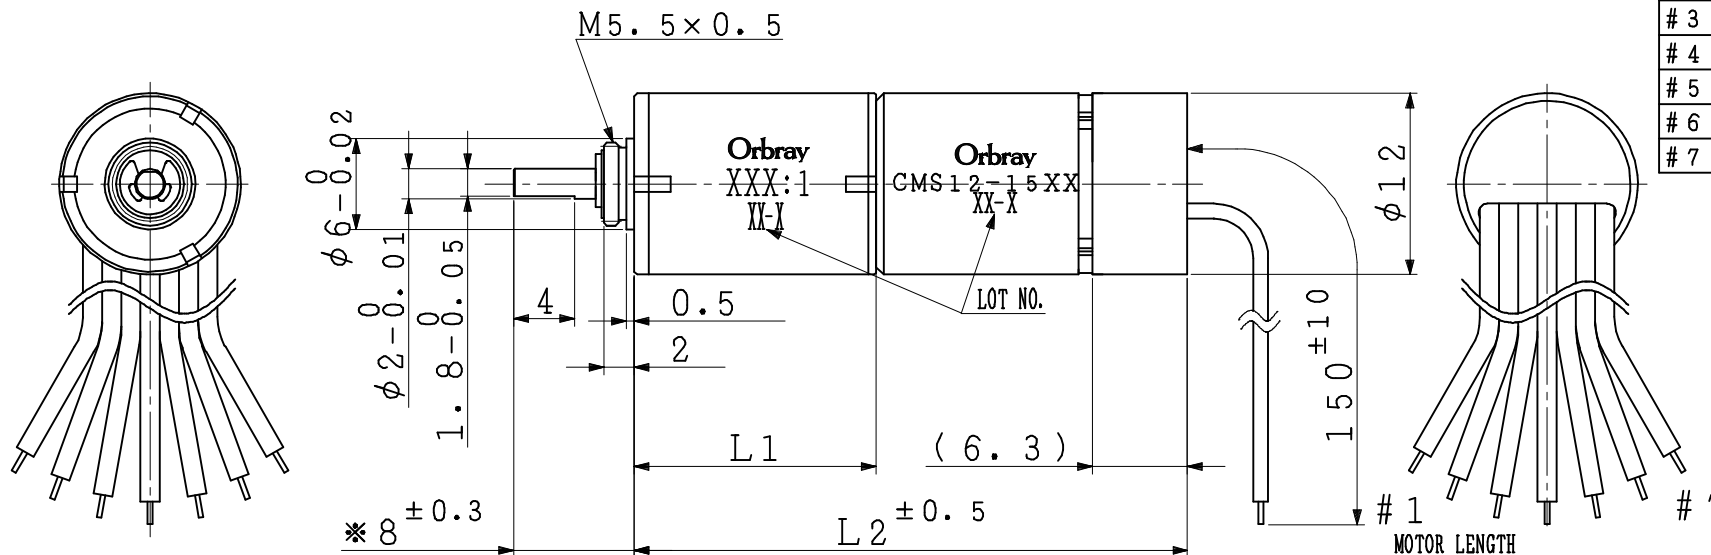

GEAR RATIO	L1	L2
16	14	34.6
25	14	34.6
47	16	36.6
74	16	36.6
94	16	36.6
176	18	38.6
282	18	38.6

NOTE 1) MARKED(*) IS OUTPUT SHAFT LENGTH MEASURED WHEN IT IS PUSHED TO MOTOR SIDE.

*印寸法は出力軸をモータ側に押しつけた時の値を示す。

2) LOT NO.

EXAMPLE) JANUARY, 2018

「18-A」

JANUARY:A, FEBRUARY:B...DECEMBER:L

1月:A、2月:B...12月:L

「-」 :MADE IN THAILAND

「-」有り :海外工場生産

「-」NONE :MADE IN JAPAN

「-」無し :国内工場生産

THE END TWO DIGIT OF CHRISTIAN YEAR

西暦年数末尾数字2桁

3) THE LEAD WIRE IS AWG28 UL4539.

リード線はAWG28 UL4539を使用する。

4) OUTSIDE DIAMETER IS NOT APPLIED TO THE CAULKING.

外径寸法公差はカシメ部を除く。

TOLERANCE				△	×				
DIMENSION(±)				ANGLE	△	×			
	0	1	2	3					
L≤6	0.05	0.1	0.1	0.2	±1°				
6<L≤30	0.1	0.1	0.2	0.5					
30<L≤120	0.15	0.2	0.3	0.8					
120<L	0.2	0.3	0.5	1.2					
MATERIAL	FINISH	QTY.		SCALE	2/1	TYPE	CMS12-15 S 0		
				UNIT	1/1mm	TITLE	OUTLINE DRAWING		
APPD.	CHK.	DSGN.	DRW.	DWG.NO.					
				REF.NO.					
		15-Jan-18	15-Jan-18	CHK.NO.		REMARK	Rev. 00		